

weiss
ngiz



PS100

Power Supply
Variable AC / DC

Power Supply Variable AC / DC

Introduction

Weis is a specialist company with over 40 years of experience in the commissioning, testing & maintenance of switchgear and power network fault monitoring within the Power Utility Industry.

The **PS100** Power Supply is a variable power source, mainly for Switchgear Testing and is an instrument intended for use in Power Station, Substation & industrial environments.

As Station Batteries should not be used or interfered with, the **PS100** provides an ideal alternative power source for testing the breaker, as well as for minimum operating voltage testing of breaker coils, as laid out in international rules and regulations.

Also available within our range of switchgear test equipment:

- ▶ **SA100**, Switchgear Analyser

- ▶ **SA100R**, Switchgear Analyser


- ▶ **SA100RS**, Breaker Analyser

- ▶ **SA100s**, Breaker Timing Test Set

- ▶ **MM100**, Micro-ohm Meter

- ▶ **RT100**, Secondary Injection Relay Test Set

- ▶ **SA200**, Automated Factory Test System

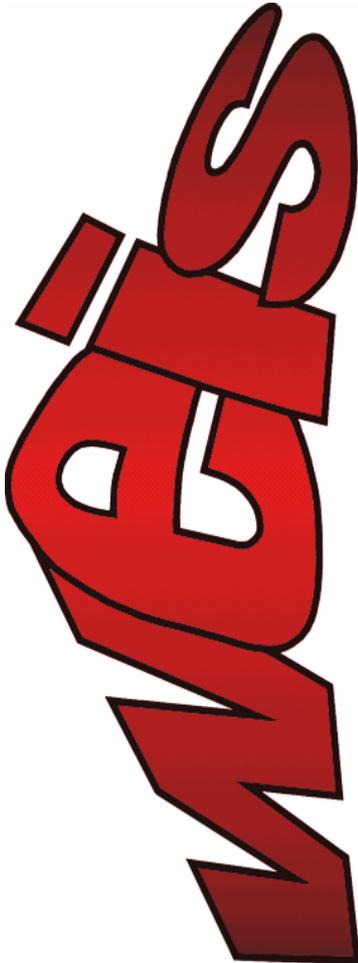

Specifications

OUTPUT

AC Power: 0 to 280V AC
30A peak
DC Power: 0 to 280V DC
30A peak
Ripple: < 2%

OUTPUT CHARACTERISTICS

DC Breaker Coils:

No-load Voltage	Current	Load Dependency
24V	10A	< 5%
48V	10A	< 3%
55V	10A	< 3%
110 / 120V	8A	< 2%
220 / 240V	3A	< 2%
280V	1.5A	< 2%

AC Breaker Coils:

Voltage Range	Load Current	Load Interval
0-280V AC	10A max.	30min max.

DC Spring Charging:

Open Circuit Voltage	Current	Load Voltage	Max. Load Interval
24V	20A	20V	30s
48V	15A	40V	60s
55V	20A	40V	30s
110 / 120V	15A	95V	40s
220 / 240V	10A	190V	30s



MEASUREMENT

Readout: 3 digit backlight LCD display
Resolution: 1V steps
Displayed Values: AC Voltage
AC Current
DC Voltage
DC Current
Accuracy: +/- 1% of displayed value

OPERATING VOLTAGES

Fixed Prime Power: 220 to 240V 50/60Hz
or
110 to 120V 50/60Hz
Auto-sensing

ENVIRONMENTAL

Operating Temperature: -20°C to +70°C (-4°F to +158°F)
Humidity: 0 to 97% RH non-condensing
Isolation: 2kV rms for 1 minute
Surge Withstand Transient: To IEC 801-5. 1.2/50µS
Common Mode: Severity level class 4. Series Mode: Severity level class 3
Fast Transient Burst: To IEC 801-4 level 3
RFI Immunity: To IEC801-3 level 3. 10V/m 26-1000MHz
Emissions: To EN50081-1: 1992



MECHANICAL DETAILS

Weight: < 20Kg
Carry Case: Reinforced aluminium, 340mm x 240mm x 150mm

Power Supply Variable AC / DC

PS100



HEAD OFFICE

WEIS GMBH & Co. KG

Kaffeestrasse 4
28779 Bremen
Germany
Tel: +49 (0) 421 606040
Fax: +49 (0) 421 607066
Email: WeisGmbHBremen@t-online.de



Room 506, Building 7, No.59, Shennan Road
Taihong R&D Office Part, Minhang District
Shanghai China 201108
Tel / Fax: +86 (0) 21 34635190
Email: gui.shanghai@hotmail.com

www.weisgmbh.com

UK OFFICE

WEIS GMBH & Co. KG

'Bay Trees' 47 Beltinge Road
Herne Bay
Kent CT6 6DA
UK
Tel: +44 (0) 1227 749413
Email: sales@WeisGmbH.com